

# The Navier-Stokes equation

1

## Overview

- Understanding the derivation of the differential linear momentum equation for incompressible Newtonian fluids – the Navier-Stokes equation.
- This is a set of partial differential equations that are valid at any point in the flow.
- When solved, together with the continuity equation, these equations yield details about the velocity, density, pressure, etc., at every point throughout the entire flow domain.
- From these fields, by integration, we can find the gross features of the flow such as the net force on the walls or on immersed bodies.
- Obtaining analytical solutions of the equation of motion for simple flow fields.
- Derivation of the Stoke's equation for creeping flow. Obtaining the drag force on a sphere in a uniform stream.
- Other applications of the Stoke's equation.

2

## Differential analysis: mass

We start with the conservation of mass, which through the RTT yields the continuity equation

Continuity equation:  $\frac{\partial \rho}{\partial t} + \nabla \cdot (\rho \vec{V}) = 0$

Alternative form of the continuity equation:  
 $\frac{1}{\rho} \frac{D\rho}{Dt} + \nabla \cdot \vec{V} = 0$

Continuity equation in cylindrical coordinates:  
 $\frac{\partial \rho}{\partial t} + \frac{1}{r} \frac{\partial(r\rho u)}{\partial r} + \frac{1}{r} \frac{\partial(\rho v \theta)}{\partial \theta} + \frac{\partial(\rho w_z)}{\partial z} = 0$

Steady continuity equation:  $\nabla \cdot (\rho \vec{V}) = 0$



3

## Incompressible continuity equation:


$$\nabla \cdot \vec{V} = 0$$

Incompressible continuity equation in Cartesian coordinates:


$$\frac{\partial u}{\partial x} + \frac{\partial v}{\partial y} + \frac{\partial w}{\partial z} = 0$$

Incompressible continuity equation in cylindrical coordinates:

$$\frac{1}{r} \frac{\partial(r u_r)}{\partial r} + \frac{1}{r} \frac{\partial(u_\theta)}{\partial \theta} + \frac{\partial(u_z)}{\partial z} = 0$$



4

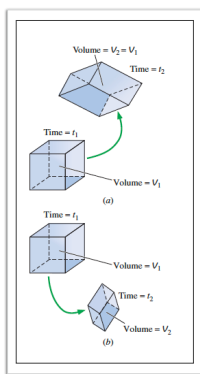

The volumetric strain rate vanishes for incompressible flows.

$$\frac{1}{V} \frac{DV}{Dt} = \epsilon_{xx} + \epsilon_{yy} + \epsilon_{zz} = \frac{\partial u}{\partial x} + \frac{\partial v}{\partial y} + \frac{\partial w}{\partial z}$$


$$\frac{1}{V} \frac{DV}{Dt} = 0$$

5

## Differential analysis: momentum

- For a control volume the RTT gives the momentum equation:

$$\sum \vec{F} = \int_{CV} \rho \vec{g} dV + \int_{CS} \sigma_{ij} \vec{n} dA = \int_{CV} \frac{\partial}{\partial t} (\rho \vec{V}) dV + \int_{CS} (\rho \vec{V}) \vec{V} \cdot \vec{n} dA$$



- The total force acting on the control volume is equal to the rate at which momentum changes within the control volume plus the rate at which momentum flows out of the control volume minus the rate at which momentum flows into the control volume.

- The divergence theorem implies that

$$\int_{CS} (\rho \vec{V}) \vec{V} \cdot \vec{n} dA = \int_{CV} \nabla \cdot (\rho \vec{V} \vec{V}) dV$$

6

and

$$\int_{CS} \sigma_{ij} \vec{n} dA = \int_{CV} \vec{\nabla} \cdot \sigma_{ij} dV$$

• Re-arranging the terms, we find the equation

$$\int_{CV} \left[ \frac{\partial}{\partial t} (\rho \vec{V}) + \vec{\nabla} \cdot (\rho \vec{V} \vec{V}) - \rho \vec{g} - \vec{\nabla} \cdot \sigma_{ij} \right] dV = 0$$

valid for any CV and thus, we obtain the Cauchy equation of motion

Cauchy's equation: 
$$\frac{\partial}{\partial t} (\rho \vec{V}) + \vec{\nabla} \cdot (\rho \vec{V} \vec{V}) = \rho \vec{g} + \vec{\nabla} \cdot \sigma_{ij}$$

Other derivations are possible, e.g. by starting from an infinitesimal CV.

7

### Alternative form of Cauchy's equation


- Clearly, 
$$\frac{\partial}{\partial t} (\rho \vec{V}) = \rho \frac{\partial \vec{V}}{\partial t} + \vec{V} \frac{\partial \rho}{\partial t}$$
- The second term of Cauchy's equation can be written as 
$$\vec{\nabla} \cdot (\rho \vec{V} \vec{V}) = \vec{V} \cdot \vec{\nabla} (\rho \vec{V}) + \rho (\vec{V} \cdot \vec{\nabla}) \vec{V}$$
- Substituting this into the Cauchy's equation we find 
$$\rho \frac{\partial \vec{V}}{\partial t} + \vec{V} \left[ \frac{\partial \rho}{\partial t} + \vec{\nabla} \cdot (\rho \vec{V}) \right] + \rho (\vec{V} \cdot \vec{\nabla}) \vec{V} = \rho \vec{g} + \vec{\nabla} \cdot \sigma_{ij}$$
- The continuity equation implies that the term in brackets vanishes and then

Alternative form of Cauchy's equation:

$$\rho \left[ \frac{\partial \vec{V}}{\partial t} + (\vec{V} \cdot \vec{\nabla}) \vec{V} \right] = \rho \frac{D\vec{V}}{Dt} = \rho \vec{g} + \vec{\nabla} \cdot \sigma_{ij}$$

8

### Cauchy's equation in cartesian components

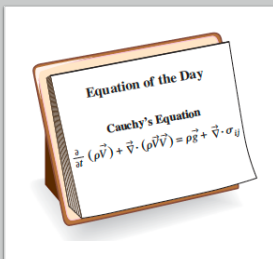

x-component: 
$$\rho \frac{Dv_x}{Dt} = \rho g_x + \frac{\partial \sigma_{xx}}{\partial x} + \frac{\partial \sigma_{xy}}{\partial y} + \frac{\partial \sigma_{xz}}{\partial z}$$

y-component: 
$$\rho \frac{Dv_y}{Dt} = \rho g_y + \frac{\partial \sigma_{yx}}{\partial x} + \frac{\partial \sigma_{yy}}{\partial y} + \frac{\partial \sigma_{yz}}{\partial z}$$

z-component: 
$$\rho \frac{Dv_z}{Dt} = \rho g_z + \frac{\partial \sigma_{zx}}{\partial x} + \frac{\partial \sigma_{zy}}{\partial y} + \frac{\partial \sigma_{zz}}{\partial z}$$

9

### The Navier-Stokes equation

- To be mathematically solvable, the number of equations must equal the number of unknowns, and thus we need six more equations.
- These equations are called constitutive equations, and they enable us to write the components of the stress tensor in terms of the velocity and pressure fields.
- The first thing we do is to separate the pressure stresses and the viscous stresses.
- For a fluid at rest

Fluid at rest: 
$$\sigma_{ij} = \begin{pmatrix} \sigma_{xx} & \sigma_{xy} & \sigma_{xz} \\ \sigma_{yx} & \sigma_{yy} & \sigma_{yz} \\ \sigma_{zx} & \sigma_{zy} & \sigma_{zz} \end{pmatrix} = \begin{pmatrix} -P & 0 & 0 \\ 0 & -P & 0 \\ 0 & 0 & -P \end{pmatrix}$$

10

• For moving fluids,

Moving fluids:

$$\sigma_{ij} = \begin{pmatrix} \sigma_{xx} & \sigma_{xy} & \sigma_{xz} \\ \sigma_{yx} & \sigma_{yy} & \sigma_{yz} \\ \sigma_{zx} & \sigma_{zy} & \sigma_{zz} \end{pmatrix} = \begin{pmatrix} -P & 0 & 0 \\ 0 & -P & 0 \\ 0 & 0 & -P \end{pmatrix} + \begin{pmatrix} \tau_{xx} & \tau_{xy} & \tau_{xz} \\ \tau_{yx} & \tau_{yy} & \tau_{yz} \\ \tau_{zx} & \tau_{zy} & \tau_{zz} \end{pmatrix}$$


- where we have introduced a new tensor,  $\tau_{ij}$ , called the viscous stress tensor or the deviatoric stress tensor.
- There are constitutive equations that express  $\tau_{ij}$  in terms of the velocity field and measurable fluid properties such as the viscosity.
- The actual form of the constitutive relations depends on the type of fluid.
- For incompressible fluids  $P$  is the mechanical pressure

Mechanical pressure: 
$$P_m = -\frac{1}{3} (\sigma_{xx} + \sigma_{yy} + \sigma_{zz})$$

11


### Newtonian and non-Newtonian fluids

- Newtonian fluids, defined as fluids for which the shear stress is linearly proportional to the shear strain rate. Many common fluids, such as air and other gases, water, kerosene, gasoline, and other oil-based liquids, are Newtonian fluids.
- Fluids for which the shear stress is not linearly related to the shear strain rate are called non-Newtonian fluids. Examples include slurries and colloidal suspensions, polymer solutions, blood, paste, and cake batter.

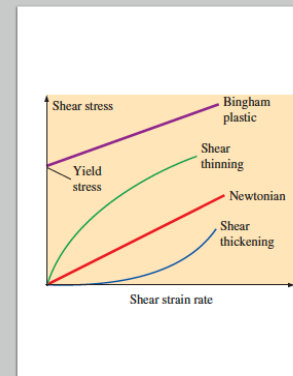


12

# Newtonian fluids

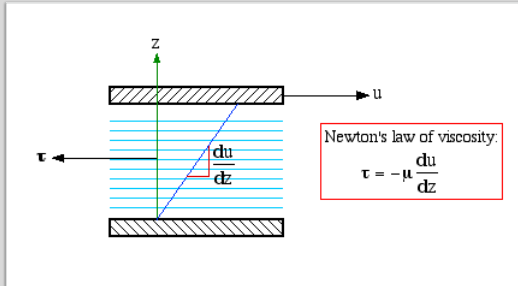


13

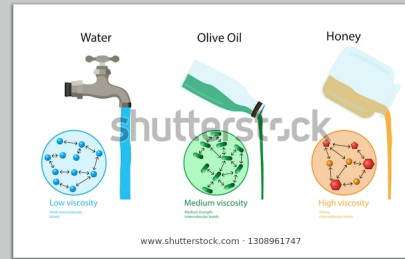

# Viscosity of Newtonian fluids

Characterizes the degree of internal 'friction'

14

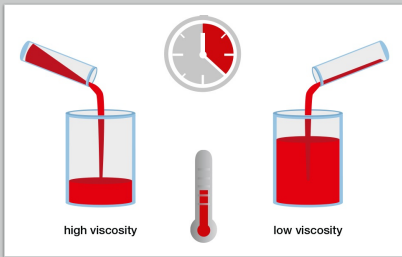

This 'friction', viscous stress, is associated with the resistance offered by two adjacent layers of the fluid to their relative motion.

15

# Navier-Stokes equation for incompressible and isothermal flow

Viscous stress tensor for an incompressible Newtonian fluid with constant properties:

$$\tau_{ij} = 2\mu\epsilon_{ij}$$

where  $\mu$  is the shear viscosity and  $\epsilon_{ij}$  the rate of strain tensor. These are called Newtonian fluids.

In cartesian coordinates, the deviatoric stress tensor becomes

$$\tau_{ij} = \begin{pmatrix} \tau_{xx} & \tau_{xy} & \tau_{xz} \\ \tau_{yx} & \tau_{yy} & \tau_{yz} \\ \tau_{zx} & \tau_{zy} & \tau_{zz} \end{pmatrix} = \begin{pmatrix} 2\mu \frac{\partial u}{\partial x} & \mu \left( \frac{\partial u}{\partial y} + \frac{\partial v}{\partial x} \right) & \mu \left( \frac{\partial u}{\partial z} + \frac{\partial w}{\partial x} \right) \\ \mu \left( \frac{\partial v}{\partial x} + \frac{\partial u}{\partial y} \right) & 2\mu \frac{\partial v}{\partial y} & \mu \left( \frac{\partial v}{\partial z} + \frac{\partial w}{\partial y} \right) \\ \mu \left( \frac{\partial w}{\partial x} + \frac{\partial u}{\partial z} \right) & \mu \left( \frac{\partial w}{\partial y} + \frac{\partial v}{\partial z} \right) & 2\mu \frac{\partial w}{\partial z} \end{pmatrix}$$

16

# Stress tensor for Newtonian fluids

$$\sigma_{ij} = \begin{pmatrix} -P & 0 & 0 \\ 0 & -P & 0 \\ 0 & 0 & -P \end{pmatrix} + \begin{pmatrix} 2\mu \frac{\partial u}{\partial x} & \mu \left( \frac{\partial u}{\partial y} + \frac{\partial v}{\partial x} \right) & \mu \left( \frac{\partial u}{\partial z} + \frac{\partial w}{\partial x} \right) \\ \mu \left( \frac{\partial v}{\partial x} + \frac{\partial u}{\partial y} \right) & 2\mu \frac{\partial v}{\partial y} & \mu \left( \frac{\partial v}{\partial z} + \frac{\partial w}{\partial y} \right) \\ \mu \left( \frac{\partial w}{\partial x} + \frac{\partial u}{\partial z} \right) & \mu \left( \frac{\partial w}{\partial y} + \frac{\partial v}{\partial z} \right) & 2\mu \frac{\partial w}{\partial z} \end{pmatrix}$$

Substituting this into Cauchy's equation we find, in the x direction:

$$\rho \frac{Du}{Dt} = -\frac{\partial P}{\partial x} + \rho g_x + 2\mu \frac{\partial^2 u}{\partial x^2} + \mu \left( \frac{\partial^2 v}{\partial x \partial y} + \frac{\partial^2 v}{\partial y \partial x} \right) + \mu \frac{\partial}{\partial z} \left( \frac{\partial w}{\partial x} + \frac{\partial u}{\partial z} \right)$$

We note that as long as the velocity components are smooth functions of x, y, and z, the order of differentiation is irrelevant. For example, the first part of the last term above can be rewritten as

$$\mu \frac{\partial}{\partial z} \left( \frac{\partial w}{\partial x} \right) = \mu \frac{\partial}{\partial x} \left( \frac{\partial w}{\partial z} \right)$$

17

After some (clever) re-arrangements of the viscous terms we find

$$\rho \frac{Du}{Dt} = -\frac{\partial P}{\partial x} + \rho g_x + \mu \left[ \frac{\partial^2 u}{\partial x^2} + \frac{\partial}{\partial x} \left( \frac{\partial u}{\partial x} + \frac{\partial v}{\partial x} \right) + \frac{\partial^2 u}{\partial y^2} + \frac{\partial}{\partial x} \left( \frac{\partial w}{\partial x} + \frac{\partial u}{\partial z} \right) \right]$$

$$= -\frac{\partial P}{\partial x} + \rho g_x + \mu \left[ \frac{\partial}{\partial x} \left( \frac{\partial u}{\partial x} + \frac{\partial v}{\partial x} + \frac{\partial w}{\partial z} \right) + \frac{\partial^2 u}{\partial x^2} + \frac{\partial^2 u}{\partial y^2} + \frac{\partial^2 u}{\partial z^2} \right]$$

and thus

$$\rho \frac{Du}{Dt} = -\frac{\partial P}{\partial x} + \rho g_x + \mu \nabla^2 u$$

Similarly,

$$\rho \frac{Dv}{Dt} = -\frac{\partial P}{\partial y} + \rho g_y + \mu \nabla^2 v$$

$$\rho \frac{Dw}{Dt} = -\frac{\partial P}{\partial z} + \rho g_z + \mu \nabla^2 w$$

Incompressible Navier-Stokes equation:

$$\rho \frac{D\vec{V}}{Dt} = -\nabla P + \rho \vec{g} + \mu \nabla^2 \vec{V}$$

18

Cartesian coordinates

Incompressible continuity equation:

$$\frac{\partial u}{\partial x} + \frac{\partial v}{\partial y} + \frac{\partial w}{\partial z} = 0$$

x-component of the incompressible Navier-Stokes equation:

$$\rho \left( \frac{\partial u}{\partial t} + u \frac{\partial u}{\partial x} + v \frac{\partial u}{\partial y} + w \frac{\partial u}{\partial z} \right) = -\frac{\partial P}{\partial x} + \rho g_x + \mu \left( \frac{\partial^2 u}{\partial x^2} + \frac{\partial^2 u}{\partial y^2} + \frac{\partial^2 u}{\partial z^2} \right)$$

y-component of the incompressible Navier-Stokes equation:

$$\rho \left( \frac{\partial v}{\partial t} + u \frac{\partial v}{\partial x} + v \frac{\partial v}{\partial y} + w \frac{\partial v}{\partial z} \right) = -\frac{\partial P}{\partial y} + \rho g_y + \mu \left( \frac{\partial^2 v}{\partial x^2} + \frac{\partial^2 v}{\partial y^2} + \frac{\partial^2 v}{\partial z^2} \right)$$

z-component of the incompressible Navier-Stokes equation:

$$\rho \left( \frac{\partial w}{\partial t} + u \frac{\partial w}{\partial x} + v \frac{\partial w}{\partial y} + w \frac{\partial w}{\partial z} \right) = -\frac{\partial P}{\partial z} + \rho g_z + \mu \left( \frac{\partial^2 w}{\partial x^2} + \frac{\partial^2 w}{\partial y^2} + \frac{\partial^2 w}{\partial z^2} \right)$$

19

Cylindrical coordinates

Incompressible continuity equation:

$$\frac{1}{r} \frac{\partial(ru)}{\partial r} + \frac{1}{r} \frac{\partial(u_\theta)}{\partial \theta} + \frac{\partial(u_z)}{\partial z} = 0$$

r-component of the incompressible Navier-Stokes equation:

$$\rho \left( \frac{\partial u}{\partial t} + u \frac{\partial u}{\partial r} + \frac{u_\theta}{r} \frac{\partial u}{\partial \theta} - \frac{u_\theta^2}{r} + u \frac{\partial u}{\partial z} \right) = -\frac{\partial P}{\partial r} + \rho g_r + \mu \left[ \frac{1}{r} \frac{\partial}{\partial r} \left( r \frac{\partial u}{\partial r} \right) - \frac{u_\theta}{r^2} + \frac{1}{r^2} \frac{\partial^2 u}{\partial \theta^2} - \frac{2}{r^2} \frac{\partial u}{\partial \theta} + \frac{\partial^2 u}{\partial z^2} \right]$$

\theta-component of the incompressible Navier-Stokes equation:

$$\rho \left( \frac{\partial u_\theta}{\partial t} + u \frac{\partial u_\theta}{\partial r} + \frac{u_\theta}{r} \frac{\partial u_\theta}{\partial \theta} + u \frac{\partial u_\theta}{\partial z} \right) = -\frac{1}{r} \frac{\partial P}{\partial \theta} + \rho g_\theta + \mu \left[ \frac{1}{r} \frac{\partial}{\partial r} \left( r \frac{\partial u_\theta}{\partial r} \right) - \frac{u_\theta}{r^2} + \frac{1}{r^2} \frac{\partial^2 u_\theta}{\partial \theta^2} + \frac{2}{r^2} \frac{\partial u}{\partial \theta} + \frac{\partial^2 u_\theta}{\partial z^2} \right]$$

z-component of the incompressible Navier-Stokes equation:

$$\rho \left( \frac{\partial u_z}{\partial t} + u \frac{\partial u_z}{\partial r} + \frac{u_\theta}{r} \frac{\partial u_z}{\partial \theta} + u \frac{\partial u_z}{\partial z} \right) = -\frac{\partial P}{\partial z} + \rho g_z + \mu \left[ \frac{1}{r} \frac{\partial}{\partial r} \left( r \frac{\partial u_z}{\partial r} \right) + \frac{1}{r^2} \frac{\partial^2 u_z}{\partial \theta^2} + \frac{\partial^2 u_z}{\partial z^2} \right]$$

20

Viscous stress tensor in cylindrical coordinates

$$\tau_{ij} = \begin{pmatrix} \tau_{rr} & \tau_{r\theta} & \tau_{rz} \\ \tau_{\theta r} & \tau_{\theta\theta} & \tau_{\theta z} \\ \tau_{zr} & \tau_{z\theta} & \tau_{zz} \end{pmatrix} = \begin{pmatrix} 2\mu \frac{\partial u_r}{\partial r} & \mu \left[ r \frac{\partial}{\partial r} \left( \frac{u_\theta}{r} \right) + \frac{1}{r} \frac{\partial u_r}{\partial \theta} \right] & \mu \left( \frac{\partial u_z}{\partial z} + \frac{\partial u_r}{\partial r} \right) \\ \mu \left[ r \frac{\partial}{\partial r} \left( \frac{u_\theta}{r} \right) + \frac{1}{r} \frac{\partial u_r}{\partial \theta} \right] & 2\mu \left( \frac{1}{r} \frac{\partial u_\theta}{\partial \theta} + \frac{u_r}{r} \right) & \mu \left( \frac{\partial u_\theta}{\partial z} + \frac{1}{r} \frac{\partial u_z}{\partial \theta} \right) \\ \mu \left( \frac{\partial u_z}{\partial z} + \frac{\partial u_r}{\partial r} \right) & \mu \left( \frac{\partial u_\theta}{\partial z} + \frac{1}{r} \frac{\partial u_z}{\partial \theta} \right) & 2\mu \frac{\partial u_z}{\partial z} \end{pmatrix}$$

21

Alternative derivation of the Navier-Stokes equation (skip on a first reading)

- It can be shown (Faber page 196-198) that the isotropy of the fluid, the symmetry of the shear stress and the linearity between stress and strain rate imply,

$$p_i = p - \frac{2}{3} \eta \left( 2 \frac{\partial u_i}{\partial x_i} - \frac{\partial u_i}{\partial x_i} - \frac{\partial u_i}{\partial x_i} \right),$$

where

$$3p = p'_1 + p'_2 + p'_3 = p_1 + p_2 + p_3,$$

with similar equations for 2 and 3.

- For incompressible fluids, the equations may be re-written,

$$p_i = p - 2\eta \frac{\partial u_i}{\partial x_i},$$

or else that

$$p_i = p + 2\eta \left( \frac{\partial u_i}{\partial x_i} + \frac{\partial u_i}{\partial x_i} \right)$$

22

Now any second-rank tensor may be expressed as the sum of three parts, one of which is isotropic in character and the other two anisotropic. The two anisotropic parts are traceless tensors (the word 'traceless' means in this context that when the tensors' components are written out in matrix form the diagonal ones sum to zero), one of them symmetric and the other antisymmetric; the components of the antisymmetric part change sign when the reference axes are reflected (i.e. when they are labelled according to the left-handed convention instead of the right-handed one, or vice versa), but the components of the symmetric part are unaffected by reflection. The stress tensor, for example, may be divided thus:

$$\sigma_{ij} = \frac{1}{3} \delta_{ij} \sigma_{mm} + \frac{1}{2} (\sigma_{ij} + \sigma_{ji} - \frac{2}{3} \delta_{ij} \sigma_{mm}) + \frac{1}{2} (\sigma_{ij} - \sigma_{ji}),$$

where, according to the standard summation convention for repeated dummy suffices,

$$\sigma_{mm} = \sigma_{11} + \sigma_{22} + \sigma_{33} = -3p;$$

we may write the symmetric anisotropic part of the stress tensor –

$$\sigma_{ij} + \delta_{ij} p = a_{ij} \text{ (say),}$$

while the antisymmetric anisotropic part – the third term – evidently vanishes.

23

If the rate of deformation tensor is divided in this way its isotropic part turns out to be

$$\frac{1}{3} \delta_{ij} \frac{\partial u_m}{\partial x_m} = \left[ \frac{1}{3} \delta_{ij} \nabla \cdot \mathbf{u} \right],$$

while its symmetric and antisymmetric anisotropic parts are respectively


$$\frac{1}{2} \left( \frac{\partial u_i}{\partial x_j} + \frac{\partial u_j}{\partial x_i} - \frac{2}{3} \delta_{ij} \frac{\partial u_m}{\partial x_m} \right) = \zeta_{ij} \text{ (say)}$$

and

$$\frac{1}{2} \left( \frac{\partial u_i}{\partial x_j} - \frac{\partial u_j}{\partial x_i} \right) = \omega_{ij} \text{ (say).}$$

The symbol  $\omega$  is appropriate in (6.19) because what  $\omega_{ij}$  describes on its own is the local rate of rotation of the medium; its six non-zero components are the components of the vectors  $+\frac{1}{2}\boldsymbol{\Omega}$  and  $-\frac{1}{2}\boldsymbol{\Omega}$ , where  $\boldsymbol{\Omega}$  is the vorticity. What  $\zeta_{ij}$  describes on its own is a type of shear flow which is vorticity-free.

24

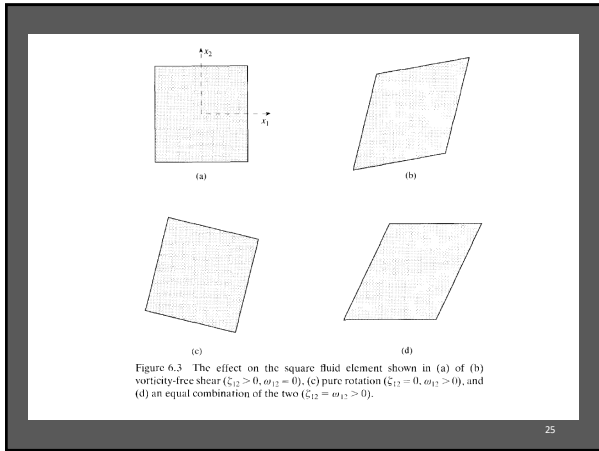

25

Where one second-rank tensor depends upon another in a linear fashion, the coefficient is a fourth-rank tensor which in general may have up to 81 independent components. However, the fourth-rank tensor which relates stress to rate of deformation in a Newtonian fluid must be isotropic if the fluid itself is isotropic, and this greatly reduces its complexity. It turns out that each of the three parts of the stress tensor must then be separately related in a linear fashion to the corresponding part of the rate of deformation tensor, and that the coefficient is in each case a scalar. For example, we must expect

$$\frac{1}{2}(\sigma_{ij} - \sigma_{ji}) \propto \omega_{ij}$$

In this case the scalar coefficient of proportionality must be zero because the antisymmetric part of the stress is always zero, and this is no surprise; local rotation does not change the separation between any two points embedded in the fluid an infinitesimal distance apart, so there is no reason to expect it to give rise to stress. More significantly, we must expect  $q_{ij}$  to be proportional to  $\xi_{ij}$ , and by choosing the constant of proportionality to be  $2\eta$  we arrive at once,

$$s_{ij} = \eta \left( \frac{\partial u_i}{\partial x_j} + \frac{\partial u_j}{\partial x_i} \right); \quad -p_i + p = \eta \left( 2 \frac{\partial u_i}{\partial x_i} - \frac{2}{3} \frac{\partial u_m}{\partial x_m} \right)$$

26

### Bulk viscosity

The results of the previous section suggest that in a Newtonian fluid a linear relation is likely to exist between the isotropic part of the stress tensor,  $\delta_{ij} p$ , and the isotropic part of the rate of deformation tensor,  $\frac{1}{3} \delta_{ij} (\partial u_m / \partial x_m)$  or  $\frac{1}{3} \delta_{ij} \nabla \cdot \mathbf{u}$ . The two cannot be simply proportional to one another, however, because  $p$  does not vanish when  $\nabla \cdot \mathbf{u}$  vanishes. Instead, it is related in that limit to the local density  $\rho$  and temperature  $T$  through an equation of state

$$p = p_{\text{equ}}(\rho, T),$$

where the suffix stands for 'equilibrium'. Hence we should presumably write

$$-p = -p_{\text{equ}} + \eta_b \nabla \cdot \mathbf{u}, \quad (6.20)$$

on the understanding that, if the rate of deformation is so rapid that the medium is no longer in local thermal equilibrium at a well-defined temperature,  $p_{\text{equ}}$  can in principle be calculated from  $\rho$  and  $T$  instead of  $\rho$  and  $T$ . The scalar constant  $\eta_b$  is known as the *bulk viscosity* of the fluid, or sometimes as its *second viscosity*, to distinguish it from the shear viscosity  $\eta$ . Since  $\nabla \cdot \mathbf{u}$  is related to rate of change of density through the continuity condition [(2.6)], (6.20) can be expressed as

$$p = p_{\text{equ}} + \frac{\eta_b}{\rho} \frac{D\rho}{Dt} \quad (6.21)$$

if preferred.

27

### Total force on a fluid element (component 1)

$$f_1 = \frac{1}{\rho} \left( -\frac{\partial p_1}{\partial x_1} + \frac{\partial s_3}{\partial x_2} + \frac{\partial s_2}{\partial x_3} - g \frac{\partial z}{\partial x_1} \right).$$

28

Supposing the fluid to be Newtonian and effectively incompressible,

$$f_1 = -\frac{\partial}{\partial x_1} \left( \frac{p}{\rho} + gz \right) + \frac{\eta}{\rho} \left( -2 \frac{\partial^2 u_2}{\partial x_1 \partial x_2} - 2 \frac{\partial^2 u_3}{\partial x_1 \partial x_3} + \frac{\partial^2 u_1}{\partial x_2^2} + \frac{\partial^2 u_2}{\partial x_2 \partial x_1} + \frac{\partial^2 u_3}{\partial x_3 \partial x_1} + \frac{\partial^2 u_1}{\partial x_3^2} \right)$$

After rearrangement of terms this becomes

$$f_1 = -\frac{\partial}{\partial x_1} \left( \frac{p}{\rho} + gz \right) - \frac{\eta}{\rho} \left( \frac{\partial}{\partial x_2} \left( \frac{\partial u_2}{\partial x_1} - \frac{\partial u_1}{\partial x_2} \right) - \frac{\partial}{\partial x_3} \left( \frac{\partial u_1}{\partial x_3} - \frac{\partial u_3}{\partial x_1} \right) \right),$$

and the complicated expression enclosed by curly brackets on the right-hand side is just the  $x_1$  component of  $\nabla \wedge (\nabla \wedge \mathbf{u})$ , i.e. of  $\nabla \wedge \boldsymbol{\Omega}$ .

The total force in vector form is

$$\mathbf{f} = -\nabla \left( \frac{p}{\rho} + gz \right) - \frac{\eta}{\rho} \nabla \wedge \boldsymbol{\Omega}.$$

29

### Navier-Stokes equation for incompressible fluids

$$-\nabla p^* - \eta \nabla \wedge \boldsymbol{\Omega} = \rho \frac{\partial \mathbf{u}}{\partial t} + \rho (\mathbf{u} \cdot \nabla) \mathbf{u},$$

where  $p^*$  is the local *excess mean pressure* defined by (2.21). Equation (6.25) is the equation of motion which replaces Euler's equation for a fluid which has viscosity but which is still effectively incompressible and also, to be on the safe side, isothermal. It differs from Euler's equation only, of course, in so far as it includes a viscous term.

Obviously, the term involving  $\eta$  drops out when  $\boldsymbol{\Omega}$  is uniformly equal to zero. The term involving  $\eta$  also drops out, of course, when  $\boldsymbol{\Omega}$  is uniformly equal to some constant other than zero and, more generally still, whenever  $\boldsymbol{\Omega}$ , although non-uniform, is expressible as the gradient of some scalar potential

30

## Boundary conditions

- The most-used boundary condition is the no-slip condition, which states that for a fluid in contact with a solid wall, the velocity of the fluid must equal that of the wall,

No-slip boundary condition:




$$\vec{V}_{\text{fluid}} = \vec{V}_{\text{wall}}$$

- When two fluids (fluid A and fluid B) meet at an interface, the interface boundary conditions are

Interface boundary conditions:  $\vec{V}_A = \vec{V}_B$  and  $\tau_{t,A} = \tau_{t,B}$


- For a liquid in contact with a gas, with negligible surface tension effects, the free-surface boundary conditions are

Free-surface boundary conditions:  $P_{\text{liquid}} = P_{\text{gas}}$  and  $\tau_{t,\text{liquid}} = 0$



31

## Fully developed Couette flow



- Consider steady, incompressible, laminar flow of a Newtonian fluid in the narrow gap between two infinite parallel plates. The top plate is moving at speed V, and the bottom plate is stationary. The distance between these two plates is h, and gravity acts in the negative z-direction (into the page).

- The boundary conditions come from imposing the no-slip condition: (1) At the bottom plate (y = 0), u = v = w = 0. (2) At the top plate (y = h), u = V, v = 0, and w = 0.

- Continuity

$$\frac{\partial u}{\partial x} + \frac{\partial v}{\partial y} + \frac{\partial w}{\partial z} = 0 \rightarrow \frac{\partial u}{\partial x} = 0$$

Result of continuity:  $u = u(y)$  only

32

## Navier-Stokes x, y and z components:

There is no applied pressure gradient pushing the flow in the x-direction; the flow establishes itself due to viscous stresses caused by the moving upper plate.

In the x direction:

$$\rho \left( \frac{\partial u}{\partial t} + u \frac{\partial u}{\partial x} + v \frac{\partial u}{\partial y} + w \frac{\partial u}{\partial z} \right) = - \frac{\partial P}{\partial x} + \rho g_x + \mu \left( \frac{\partial^2 u}{\partial x^2} + \frac{\partial^2 u}{\partial y^2} + \frac{\partial^2 u}{\partial z^2} \right) \rightarrow \frac{d^2 u}{dy^2} = 0$$

In the y direction:

$$\frac{\partial P}{\partial y} = 0$$

Result of y-momentum:  $P = P(z)$  only

In the z direction:

$$\frac{\partial P}{\partial z} = -\rho g \rightarrow \frac{dP}{dz} = -\rho g$$


33

Integrating twice for u we find the velocity field:

$$u = C_1 y + C_2$$

Final result for velocity field:

$$u = V \frac{y}{h}$$




Pressure field:

$$P = -\rho g z + C_3$$

Final solution for pressure field:

$$P = P_0 - \rho g z$$



For incompressible flow fields without free surfaces, hydrostatic pressure does not contribute to the dynamics of the flow field.

34

## Shear force on the bottom plate


Deviatoric shear stress tensor

$$\tau_{ij} = \begin{pmatrix} 2\mu \frac{\partial u}{\partial x} & \mu \left( \frac{\partial u}{\partial y} + \frac{\partial v}{\partial x} \right) & \mu \left( \frac{\partial u}{\partial z} + \frac{\partial w}{\partial x} \right) \\ \mu \left( \frac{\partial v}{\partial x} + \frac{\partial u}{\partial y} \right) & 2\mu \frac{\partial v}{\partial y} & \mu \left( \frac{\partial v}{\partial z} + \frac{\partial w}{\partial y} \right) \\ \mu \left( \frac{\partial w}{\partial x} + \frac{\partial u}{\partial z} \right) & \mu \left( \frac{\partial w}{\partial y} + \frac{\partial v}{\partial z} \right) & 2\mu \frac{\partial w}{\partial z} \end{pmatrix} = \begin{pmatrix} 0 & \mu \frac{V}{h} & 0 \\ \mu \frac{V}{h} & 0 & 0 \\ 0 & 0 & 0 \end{pmatrix}$$

Shear force per unit area acting on the wall:  $\vec{F} = \mu \frac{V}{h} \vec{i}$

Discussion: The z-component of the linear momentum equation is uncoupled from the other equations; this explains why we get a hydrostatic pressure distribution in the z-direction, even though the fluid is not static, but moving.

The viscous stress tensor is constant everywhere in the flow field, not just at the bottom wall (note that the components of the tensor are not a function of location).



35

## Rotational viscometer

The gap between the two cylinders is very small and contains the fluid.


The magnified region is nearly identical to the parallel plates setup since the gap is small, i.e.  $(R_o - R_i) \ll R_o$ .

In a viscosity measurement, the angular velocity of the inner cylinder,  $\omega$ , is measured, as is the applied torque,  $T_{\text{applied}}$ , required to rotate the cylinder.

From the previous example, we know that the viscous shear stress acting on a fluid element adjacent to the inner cylinder is approximately equal to

$$\tau = \tau_{yz} \approx \mu \frac{V}{R_o - R_i} = \mu \frac{\omega R_i}{R_o - R_i}$$

$\tau$  acts to the right on the fluid element adjacent to the inner cylinder wall; hence, the force per unit area acting on the inner cylinder at this location, acts to the left with the same magnitude.



36

The total clockwise torque acting on the inner cylinder wall due to fluid viscosity is thus equal to this shear stress times the wall area times the moment arm,

$$T_{\text{viscom}} = \tau A R_i \approx \mu \frac{\omega R_i}{R_o - R_i} (2\pi R_i L) R_i$$

Under steady conditions, the clockwise torque  $T_{\text{viscom}}$  is balanced by the applied counterclockwise torque  $T_{\text{applied}}$ . Equating these we find

Viscosity of the fluid: 
$$\mu = T_{\text{applied}} \frac{(R_o - R_i)}{2\pi \omega R_i^2 L}$$

Derivation with the proper symmetry: see Faber page 222 or later in the course

37

### Couette flow with applied pressure gradient

The same as in Couette flow but the x-component of the momentum equation is now:

$$\text{Result of x-momentum: } \frac{d^2 u}{dy^2} = \frac{1}{\mu} \frac{\partial P}{\partial x}$$

Integrating twice yields the velocity field:

$$\text{Integration of x-momentum: } u = \frac{1}{2\mu} \frac{\partial P}{\partial x} y^2 + C_1 y + C_2$$

And the pressure is

$$\text{Integration of z-momentum: } P = -\rho g z + f(x)$$

$$\text{Final result for pressure field: } P = P_0 + \frac{\partial P}{\partial x} x - \rho g z$$

38

- Applying the velocity boundary conditions:

$$u = \frac{1}{2\mu} \frac{\partial P}{\partial x} y^2 + C_1 y + C_2 = 0 \rightarrow C_2 = 0$$

$$u = \frac{1}{2\mu} \frac{\partial P}{\partial x} h^2 + C_1 h + 0 = V \rightarrow C_1 = \frac{V}{h} - \frac{1}{2\mu} \frac{\partial P}{\partial x} h$$

$$u = \frac{V y}{h} + \frac{1}{2\mu} \frac{\partial P}{\partial x} (y^2 - h y)$$

- $u(y)$  is the velocity profile of Couette flow between parallel plates with an applied negative pressure gradient; the dashed red line indicates the profile for a zero pressure gradient, and the dotted line indicates the profile for a negative pressure gradient with the upper plate stationary ( $V < 0$ ).

39

### Dimensional analysis

- The problem is set in terms of velocity  $u$  as a function of  $y, h, V, m$ , and  $\partial P/\partial x$ . There are six variables (including the dependent variable  $u$ ), and since there are three primary dimensions (mass, length, and time), we expect 6 - 3 dimensionless groups. When we pick  $h, V$ , and  $m$  as our repeating variables, we get the following result:

$$\text{Result of dimensional analysis: } \frac{u}{V} = f\left(\frac{y}{h}, \frac{h^2}{\mu V} \frac{\partial P}{\partial x}\right)$$

$$\text{Dimensionless form of velocity field: } u^* = y^* + \frac{1}{2} P^* y^{*2} (y^* - 1)$$

40

### Oil film falling down a vertical wall

- The wall is infinite in the  $yz$ -plane ( $y$  is into the page).
- The flow is steady (partial derivatives w.r. to time are zero).
- The flow is parallel (the  $x$ -component of velocity,  $u$ , is zero).
- The fluid is incompressible and Newtonian and the flow is laminar.
- Pressure  $P = P_{\text{atm}}$  constant at the free surface. In other words, there is no applied pressure gradient pushing the flow; the flow establishes itself due to a balance between gravitational forces and viscous forces. Since there is no gravity in the horizontal direction,  $P = P_{\text{atm}}$  everywhere.
- The velocity field is purely 2D, which implies that derivatives  $w$  to  $y$  are zero.
- Gravity acts in the negative  $z$  direction.
- The boundary conditions are: no slip at the wall; at  $x = 0, u = v = w = 0$ .
- At the free surface ( $x = h$ ), there is negligible shear, which for a vertical free surface, in this coordinate system, means  $\frac{\partial w}{\partial x} = 0$  at  $x = h$ .

41

Continuity:

$$\frac{\partial w}{\partial z} + \frac{\partial v}{\partial y} + \frac{\partial u}{\partial x} = 0 \rightarrow \frac{\partial w}{\partial z} = 0$$

Result of continuity:  $w = w(x)$  only

NS  $w$ :

$$\rho \left( \frac{\partial w}{\partial t} + v \frac{\partial w}{\partial y} + u \frac{\partial w}{\partial x} \right) = \mu \left( \frac{\partial^2 w}{\partial x^2} + \frac{\partial^2 w}{\partial y^2} + \frac{\partial^2 w}{\partial z^2} \right) \rightarrow \frac{d^2 w}{dx^2} = \frac{\rho g}{\mu}$$

Integration:

$$w = \frac{\rho g}{2\mu} x^2 + C_1 x + C_2$$

Boundary condition (1):  $w = 0$  at  $x = 0 \rightarrow C_2 = 0$


and

Boundary condition (2):  $\frac{\partial w}{\partial x} = 0$  at  $x = h \rightarrow C_1 = -\frac{\rho g h}{\mu}$

$$\text{Velocity field: } w = \frac{\rho g}{2\mu} x^2 - \frac{\rho g h}{\mu} x = \frac{\rho g h^2}{2\mu} \left( \frac{x}{h} - 2 \right)$$

42

### Flow in a circular pipe: Hagen-Poiseuille



- 1 The pipe is infinitely long in the x-direction.
- 2 The flow is steady (partial time derivatives zero).
- 3 Parallel flow (r-component of velocity,  $u_r$ , zero).
- 4 The fluid is incompressible and Newtonian and flow is laminar.
- 5 A constant pressure gradient is applied in the x-direction
- 6 The velocity field is axisymmetric with no swirl, implying that  $u_\theta = 0$  and partial derivatives w.r. to  $\theta$  are zero.
- 7 We ignore the effects of gravity.
- 8 First boundary condition is no slip at the pipe wall: at  $r = R, \vec{v} = 0$ .
- 9 Second boundary condition is that the centerline of the pipe is an axis of symmetry: at  $r = 0, \frac{\partial u}{\partial r} = 0$ .

43

Continuity:

$$\frac{1}{r} \frac{\partial(\rho r u)}{\partial r} + \frac{\partial \rho u}{\partial x} = 0 \rightarrow \frac{\partial u}{\partial x} = 0$$

Result of continuity:  $u = u(r)$  only


NS u:  $\rho \left( \frac{\partial u}{\partial t} + u_r \frac{\partial u}{\partial r} + u_x \frac{\partial u}{\partial x} \right) = -\frac{\partial P}{\partial x} + \mu \left( \frac{1}{r} \frac{\partial}{\partial r} \left( r \frac{\partial u}{\partial r} \right) + \frac{\partial^2 u}{\partial x^2} \right)$

$$\frac{1}{r} \frac{d}{dr} \left( r \frac{du}{dr} \right) = \frac{1}{\mu} \frac{\partial P}{\partial x}$$

r-momentum:  $\frac{\partial P}{\partial r} = 0$   
Result of r-momentum:  $P = P(x)$  only

Integration of NS for u:  $\frac{du}{dr} = \frac{r^2}{2\mu} \frac{dP}{dx} + C_1$      $u = \frac{r^2}{4\mu} \frac{dP}{dx} + C_1 \ln r + C_2$

Axial velocity:  $u = \frac{1}{4\mu} \frac{dP}{dx} (r^2 - R^2)$



44

### Poiseuille's law for the flow rate

Maximum axial velocity:  $u_{\max} = \frac{R^2}{4\mu} \frac{dP}{dx}$

$$V = \int_0^{2\pi} \int_0^R u r dr d\theta = \frac{2\pi}{4\mu} \frac{dP}{dx} \int_0^R (r^2 - R^2) r dr = \frac{\pi R^4}{8\mu} \frac{dP}{dx}$$

Average axial velocity:  $V = \frac{\dot{V}}{A} = \frac{(-\pi R^4/8\mu) (dP/dx)}{\pi R^2} = \frac{R^2}{8\mu} \frac{dP}{dx}$


45

### Viscous shear force

The stress tensor is

$$\tau_{ij} = \begin{pmatrix} \tau_{xx} & \tau_{xy} & \tau_{xz} \\ \tau_{xy} & \tau_{yy} & \tau_{yz} \\ \tau_{xz} & \tau_{yz} & \tau_{zz} \end{pmatrix} = \begin{pmatrix} 0 & 0 & \mu \frac{du}{dr} \\ 0 & 0 & 0 \\ \mu \frac{du}{dr} & 0 & 0 \end{pmatrix}$$

Viscous shear stress at the pipe wall:  $\tau_w = \mu \frac{du}{dr} = \frac{R}{2} \frac{dP}{dx}$




For flow from left to right,  $dP/dx$  is negative, so the viscous shear stress on the bottom of the fluid element at the wall is in the direction opposite to that indicated in the figure. (This agrees with our intuition since the pipe wall exerts a retarding force on the fluid.) The shear force per unit area on the wall is equal and opposite to this; hence,

Viscous shear force per unit area acting on the wall:  $\vec{F} = -\frac{R}{2} \frac{dP}{dx} \vec{i}$

46

### Sudden motion of an infinite flat plate



Consider a Newtonian fluid on top of a flat plate in the xy-plane at  $z = 0$ . The fluid is at rest until  $t = 0$ , when the plate suddenly starts moving at speed  $V$  in the x-direction.

- 1 The wall is infinite in the x- and y-directions; thus, nothing is special about any particular x- or y-location.
- 2 The flow is parallel everywhere ( $w = 0$ ).
- 3 Pressure  $P = \text{constant}$  with respect to x. In other words, there is no applied pressure gradient pushing the flow in the x-direction; flow occurs due to viscous stresses caused by the moving plate.
- 4 The fluid is incompressible and Newtonian, and the flow is laminar.
- 5 The velocity field is two-dimensional in the xz-plane; therefore,  $v = 0$ , and all partial derivatives with respect to y are zero.
- 6 Gravity acts in the -z-direction

47

The boundary conditions are: (1) At  $t = 0, u = 0$  everywhere (no flow until the plate starts moving); (2) at  $z = 0, u = V$  for all values of x and y (no-slip condition at the plate); (3) as  $z \rightarrow \infty, u \rightarrow 0$  (far from the plate, the effect of the moving plate is not felt); and (4) at  $z = 0, P = P_{\text{wall}}$  (the pressure at the wall is constant at any x- or y-location along the plate).

Continuity:  $\frac{\partial u}{\partial x} + \frac{\partial v}{\partial y} + \frac{\partial w}{\partial z} = 0 \rightarrow \frac{\partial u}{\partial x} = 0$   
Result of continuity:  $u = u(z, t)$  only

y-momentum:  $\frac{\partial P}{\partial y} = 0$     Result of y-momentum:  $P = P(z, t)$  only

z-momentum:  $\frac{\partial P}{\partial z} = -\rho g$

x-momentum:  $\rho \left( \frac{\partial u}{\partial t} + u \frac{\partial u}{\partial x} + v \frac{\partial u}{\partial y} + w \frac{\partial u}{\partial z} \right) = \frac{\partial P}{\partial x} + \mu \left( \frac{\partial^2 u}{\partial z^2} + \frac{\partial^2 u}{\partial x^2} + \frac{\partial^2 u}{\partial y^2} \right) \rightarrow \rho \frac{\partial u}{\partial t} = \mu \frac{\partial^2 u}{\partial z^2}$

Result of x-momentum:  $\frac{\partial u}{\partial t} = \nu \frac{\partial^2 u}{\partial z^2}$

48



From the z-component we obtain the pressure

$$P = -\rho g z + f(t)$$

Boundary condition (4):  $P = 0 + f(t) = P_{\text{atm}} \rightarrow f(t) = P_{\text{atm}}$

Final result for pressure field:  $P = P_{\text{wall}} - \rho g z$

Integration of x-momentum:  $u = C_1 \left[ 1 - \operatorname{erf}\left(\frac{z}{2\sqrt{\nu t}}\right) \right]$

Error function:  $\operatorname{erf}(\xi) = \frac{2}{\sqrt{\pi}} \int_0^\xi e^{-\eta^2} d\eta$

Final result for velocity field:  $u = V \left[ 1 - \operatorname{erf}\left(\frac{z}{2\sqrt{\nu t}}\right) \right]$

49

- The 1-D diffusion equation is linear
- It is a partial differential equation (PDE)
- It is used in many fields of physics

50

The solution is the error function

$$\operatorname{erf}(\xi) = \frac{2}{\sqrt{\pi}} \int_0^\xi e^{-\eta^2} d\eta$$

The error function is 0 at  $\xi = 0$  and  $\rightarrow 1$  as  $\xi \rightarrow \infty$ .

51

Similarity solution of the 1-D diffusion equation

$$\xi = \frac{z}{2\sqrt{\nu t}}$$

52

The time required for momentum to diffuse into the fluid seems much longer than we would expect.

This is because the solution presented here is valid only for laminar flow. It turns out that if the plate's speed is large enough, or if there are significant vibrations in the plate or disturbances in the fluid, the flow will become turbulent.

In a turbulent flow, large eddies mix rapidly moving fluid near the wall with slowly moving fluid away from the wall. This mixing process occurs rather quickly, so that turbulent diffusion is usually orders of magnitude faster than laminar diffusion.

Velocity profiles of flow of water above an impulsively started infinite plate;  $\nu = 1.004 \times 10^{-6} \text{ m}^2/\text{s}$  and  $V = 1.0 \text{ m/s}$ .

53

The flow regime in the first case is said to be laminar, characterized by smooth streamlines and highly ordered motion, and turbulent in the second case, where it is characterized by velocity fluctuations and highly disordered motion.

The transition from laminar to turbulent flow does not occur suddenly; rather, it occurs over some region in which the flow fluctuates between laminar and turbulent flows before it becomes fully turbulent.

Most flows encountered in practice are turbulent. Laminar flow is encountered when highly viscous fluids such as oils flow in small pipes or narrow passages.

54

Reynolds number

$Re \lesssim 2300$	laminar flow
$2300 \lesssim Re \lesssim 4000$	transitional flow
$Re \gtrsim 4000$	turbulent flow

55

Laminar and non-laminar flow  
(MFM 199, 202, 210, 217, 521)

56

Alternative derivation for flow in a circular pipe (force balance)

Obtain the momentum equation by applying a momentum balance to a differential volume element, and we obtain the velocity profile by solving it.

Free-body diagram of a ring-shaped differential fluid element of radius  $r$ , thickness  $dr$ , and length  $dx$  oriented coaxially with a horizontal pipe in fully developed laminar flow.

$$dV = 2\pi r dr dx$$

57

In fully developed laminar flow the axial velocity is,  $u = u(r)$ . There is no motion in the radial direction. There is no acceleration since the flow is steady and fully developed.

- Consider a ring-shaped differential volume element of radius  $r$ , thickness  $dr$ , and length  $dx$  oriented coaxially with the pipe.
- The volume element involves only pressure and viscous effects and thus the pressure and shear forces must balance each other. The pressure force acting on a submerged plane surface is the product of the pressure at the centroid of the surface and the surface area. A force balance on the volume element in the flow direction gives

$$(2\pi r dx P)_x - (2\pi r dx P)_{x+dx} + (2\pi r dx \tau)_r - (2\pi r dx \tau)_{r+dr} = 0$$

Force balance implies

$$\frac{P_{x+dx} - P_x}{dx} + \frac{(\tau)_r - (\tau)_{r+dr}}{dr} = 0$$

$$r \frac{dP}{dx} + \frac{d(\tau r)}{dr} = 0$$

and substituting the stress  $\tau = -\mu(du/dr)$  we find  $\frac{\mu}{r} \frac{d}{dr} \left( r \frac{du}{dr} \right) = \frac{dP}{dx}$

At the wall,  $\pi R^2 dP$  is balanced by  $-2\pi R \tau_w dx$

Force balance:  $\pi R^2 P - \pi R^2 (P + dP) - 2\pi R dx \tau_w = 0$   
Simplifying:  $\frac{dP}{dx} = -\frac{2\tau_w}{R}$

58

Separation of variables implies that the pressure gradient is constant:  $\frac{dP}{dx} = -\frac{2\tau_w}{R}$

The velocity profile is obtained by integration and use of the boundary conditions:

$$u(r) = \frac{r^2}{4\mu} \left( \frac{dP}{dx} \right) + C_1 \ln r + C_2$$

$$u(r) = -\frac{R^2}{4\mu} \left( \frac{dP}{dx} \right) \left( 1 - \frac{r^2}{R^2} \right)$$

The average velocity is

$$V_{avg} = \frac{2}{R^2} \int_0^R u(r) r dr = \frac{-2}{R^2} \int_0^R \frac{R^2}{4\mu} \left( \frac{dP}{dx} \right) \left( 1 - \frac{r^2}{R^2} \right) r dr = -\frac{R^2}{8\mu} \left( \frac{dP}{dx} \right)$$

In terms of which the profile becomes

$$u(r) = 2V_{avg} \left( 1 - \frac{r^2}{R^2} \right)$$

59

Effect of gravity

- Gravity has no effect on flow in horizontal pipes, but it has a significant effect on both the velocity and the flow rate in uphill or downhill pipes.
- Relations for inclined pipes can be obtained in a similar manner from a force balance in the direction of flow. The only additional force in this case is the component of the fluid weight in the flow direction, which is

$$W_x = W \sin \theta = \rho g V_{control} \sin \theta = \rho g (2\pi r dr dx) \sin \theta$$

Then  $(2\pi r dx P)_x - (2\pi r dx P)_{x+dx} + (2\pi r dx \tau)_r - (2\pi r dx \tau)_{r+dr} - \rho g (2\pi r dr dx) \sin \theta = 0$

and  $\frac{\mu}{r} \frac{d}{dr} \left( r \frac{du}{dr} \right) = \frac{dP}{dx} + \rho g \sin \theta$

60

## Effect of gravity

The velocity profile, average velocity and flow rate are:


$$u(r) = -\frac{R^2}{4\mu} \left( \frac{dP}{dx} + \rho g \sin \theta \right) \left( 1 - \frac{r^2}{R^2} \right)$$

$$V_{avg} = \frac{(\Delta P - \rho g L \sin \theta) D^2}{32\mu L} \quad \text{and} \quad \dot{V} = \frac{(\Delta P - \rho g L \sin \theta) \pi D^4}{128\mu L}$$

- As expected, gravity opposes uphill flow, enhances downhill flow, and has no effect on horizontal flow.
- Downhill flow can occur even in the absence of a pressure difference applied by a pump. For the case of  $P_1 = P_2$  (i.e., no applied pressure difference), the pressure throughout the entire pipe would remain constant, and the fluid would flow through the pipe under the influence of gravity at a rate that depends on the angle of inclination, reaching its maximum value when the pipe is vertical.

61

## Cylindrical geometry (general – see Faber)



The cases of laminar flow discussed in §6.6 have analogues in which the laminae are concentric cylindrical shells rather than plane sheets. In these analogues, which are best discussed using cylindrical coordinates  $(r, \theta, x_3)$ , the fluid may move unidirectionally, parallel to the axis of the cylinders, with

$$u_3 = u(r), \quad u_r = u_\theta = 0, \quad (6.49)$$

or it may circulate about the axis with

$$u_\theta = u(r), \quad u_r = u_3 = 0. \quad (6.50)$$

62

## Longitudinal (Poiseuille) flow



When liquid moves in concentric cylindrical lamina with a longitudinal velocity which depends on radius  $r$  but not on  $\theta$  or  $x_3$ , the longitudinal shear stress components  $s_{31}$  and  $s_{13}$  do not depend on the choice of orientation for the  $x_1$  and  $x_3$  axes, and they are both equal to  $\eta(\partial u/\partial r)$ . Hence the force per unit length which shear stress exerts over a cylindrical surface of radius  $r$  on the liquid inside this surface is  $2\pi r\eta(\partial u/\partial r)$ . An element of liquid in the form of a cylindrical shell with inner radius  $r$  and outer radius  $r + dr$  therefore experiences a net longitudinal force per unit length due to shear of

$$\left( 2\pi r\eta \frac{\partial u}{\partial r} \right)_{r+dr} - \left( 2\pi r\eta \frac{\partial u}{\partial r} \right)_r = 2\pi\eta \frac{\partial}{\partial r} \left( r \frac{\partial u}{\partial r} \right) dr,$$

while the longitudinal force on it due to pressure gradients and its own weight is

$$-2\pi r dr \frac{\partial p}{\partial x_3} = -2\pi r dr \nabla_3 p.$$

Hence the equation of motion which replaces (6.27) when the laminae are cylindrical rather than planar is

$$-\nabla_3 p + \eta \frac{\partial}{\partial r} \left( r \frac{\partial u}{\partial r} \right) = \rho \frac{\partial u}{\partial t}. \quad (6.51)$$

63

The solution equivalent to (6.28) which describes steady laminar flow within a cylindrical pipe of internal radius  $a$  has been quoted already, as (1.32). It may be derived by integrating the left-hand side of (6.51) twice over  $r$  with the right-hand side set equal to zero or, equivalently, by the argument in §1.13 which requires only one integration. It leads to the *Poiseuille*, or *Hagen-Poiseuille*, equation

$$Q = -\frac{\pi a^4}{8\eta} \nabla_3 p$$

for the discharge rate  $Q$  in laminar pipe flow, already quoted as (1.33). This equation provides the basis for what is probably the most popular of all methods for the measurement of liquid viscosity.

Suppose that the pipe has an internal radius  $b$  and that a cylindrical rod of radius  $a$  ( $a < b$ ) lies along its axis, with liquid filling the interspace, and suppose that the liquid is set into motion by movement of the rod with some uniform longitudinal velocity  $U$  rather than by the application of a pressure gradient. The equation of motion which describes steady flow in such circumstances is

$$\frac{\partial}{\partial r} \left( r \frac{\partial u}{\partial r} \right) = 0,$$

and the solution which satisfies the no-slip boundary condition at  $r = a$  and  $r = b$  is

$$u = U \frac{\ln(r/b)}{\ln(a/b)}. \quad (6.52)$$

64

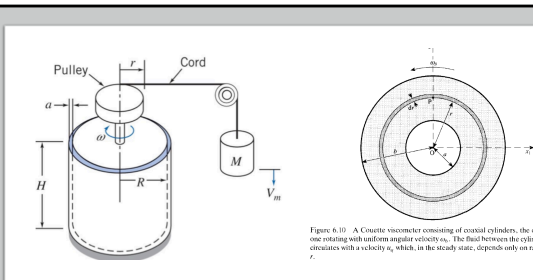


Figure 6.10 A Couette viscometer consisting of coaxial cylinders, the outer one rotating with uniform angular velocity  $\omega$ . The fluid between the cylinders circulates with a velocity  $u$ , which, in the steady state, depends only on radius  $r$ .

## Couette viscometer

65

## Couette flow

When fluid, whether liquid or gas, is circulating round the  $x_3$  axis in the manner described by equations (6.50), the only non-zero component of shear stress is  $s_{31}$ . In cartesian coordinates this is of course determined, according to (6.3), by the two velocity gradients  $\partial u/\partial x_1$  and  $\partial u_2/\partial x_1$ . At a point such as P in fig. 6.10, which lies on the  $x_2$  axis through the origin O, these gradients are given, for reasons explained in §2.7 [fig. 2.5 in particular], by:

$$\frac{\partial u_1}{\partial x_2} = -\frac{\partial u}{\partial r}, \quad \frac{\partial u_2}{\partial x_1} = \frac{u}{r} = \omega.$$

Thus in cylindrical coordinates we have

$$s_{31} = \eta \left( \frac{u}{r} - \frac{\partial u}{\partial r} \right) = -\eta r \frac{\partial}{\partial r} \left( \frac{u}{r} \right) = -\eta r \frac{\partial \omega}{\partial r} \quad (6.53)$$

at P, and the symmetry is such that  $s_{31}$  must take the same value at all points around the circle on which P lies. Shear stress is to be expected, of course, only when adjacent layers of fluid slide over one another; it is *not* to be expected if a fluid rotates about an axis like a rigid body, with an angular velocity  $\omega$  which is the same for all  $r$ , and (6.53) is therefore an unsurprising result.

66

Due to this shear stress, the liquid inside a cylinder of radius  $r$  experiences a viscous torque about the  $z_3$  axis (positive when it acts in an anticlockwise sense in fig. 6.10) given per unit length by

$$g_3 = -r(2\pi r s_3) = 2\pi\eta r^3 \frac{\partial}{\partial r} \left[ \frac{u}{r} \right] \quad (6.54)$$

Hence the cylindrical shell of liquid of thickness  $dr$  which is indicated by darker shading in fig. 6.10 experiences, in circulating flow, a net torque (the sum of torques exerted on its inner and outer surfaces) of magnitude

$$dg_3 = 2\pi\eta r \frac{\partial}{\partial r} \left[ r^3 \frac{\partial}{\partial r} \left( \frac{u}{r} \right) \right] dr$$

per unit length, and by equating this to its rate of change of angular momentum per unit length we may arrive at the equation

$$\eta \frac{\partial}{\partial r} \left[ r^3 \frac{\partial}{\partial r} \left( \frac{u}{r} \right) \right] = \rho r^2 \frac{\partial u}{\partial t} \quad (6.55)$$

There is no pressure gradient term in this equation because  $p^*$  is a single-valued quantity and  $\partial p^*/\partial \theta$  must vanish when there is cylindrical symmetry. There must of course be a radial pressure gradient to provide the centripetal acceleration characteristic of circulating flow [§2.5], and the full Navier-Stokes equation describes this as well as the content of (6.55). However, the radial pressure gradient is of no special interest here.

67

There are two basic patterns of circulation which correspond to steady flow because for each of them the left hand side of (6.55) vanishes everywhere. They are both discussed in earlier chapters [§§2.7 and 4.11 in particular]. For the first,  $u$  is proportional to  $r$ ; for the second,  $u$  is inversely proportional to  $r$ . The first corresponds to rigid-body rotation with uniform angular velocity, and the second to circulation which is vorticity-free. In both cases the viscous term in the Navier-Stokes equation vanishes, though for different reasons.

A *Couette viscometer* consists of two concentric solid cylinders of radii  $a$  and  $b$  ( $b > a$ ), the space between them being filled with fluid, which are arranged to rotate with different angular velocities,  $\omega_a$  and  $\omega_b$ ; in practice, the inner cylinder is normally stationary, i.e.  $\omega_a = 0$ . The steady flow pattern is a hybrid of the two basic patterns referred to above, and the solution which satisfies the no-slip boundary conditions ( $u = a\omega_a$  at  $r = a$ ,  $u = b\omega_b$  at  $r = b$ ) is

$$u = \frac{(b^2\omega_b - a^2\omega_a)r - b^2a^2(\omega_b - \omega_a)r^{-1}}{b^2 - a^2}$$

The fluid viscosity may be determined from measurements of the torque transmitted from one cylinder to the other once a steady state has been achieved, and per unit length this torque amounts to

$$g_3 = \frac{4\pi\eta b^2 a^2}{b^2 - a^2} (\omega_b - \omega_a) \quad (6.56)$$

Circulating flow of the sort described here, because it occurs inside a Couette viscometer, is often referred to as *Couette flow*.

68

## Non dimensionalized equations of motion

- Our goal in this section is to nondimensionalize the equations of motion so that we can properly compare the orders of magnitude of the various terms in the equations. We begin with the incompressible continuity equation,

$$\vec{\nabla} \cdot \vec{v} = 0$$

- and the vector form of the Navier-Stokes equation, valid for incompressible flow of a Newtonian fluid with constant properties,

$$\rho \frac{D\vec{v}}{Dt} = \rho \left[ \frac{\partial \vec{v}}{\partial t} + (\vec{v} \cdot \vec{\nabla}) \vec{v} \right] = -\vec{\nabla} P + \rho \vec{g} + \mu \nabla^2 \vec{v}$$

69

Scaling parameters used to nondimensionalize the continuity and momentum equations, along with their primary dimensions

Scaling Parameter	Description	Primary Dimensions
$L$	Characteristic length	{L}
$V$	Characteristic speed	{L t <sup>-1</sup> }
$f$	Characteristic frequency	{t <sup>-1</sup> }
$P_0 - P_\infty$	Reference pressure difference	{m L <sup>-1</sup> t <sup>-2</sup> }
$g$	Gravitational acceleration	{L t <sup>-2</sup> }

We can define scaled variables:

$$t^* = ft \quad \vec{x}^* = \frac{\vec{x}}{L} \quad \vec{v}^* = \frac{\vec{v}}{V}$$

$$P^* = \frac{P - P_\infty}{P_0 - P_\infty} \quad \vec{g}^* = \frac{\vec{g}}{g} \quad \vec{\nabla}^* = L \vec{\nabla}$$

70

- In terms of which the NS equation becomes

$$\rho V f \frac{\partial \vec{v}^*}{\partial t^*} + \frac{\rho V^2}{L} (\vec{v}^* \cdot \vec{\nabla}^*) \vec{v}^* = -\frac{P_0 - P_\infty}{L} \vec{\nabla}^* P^* + \rho \vec{g}^* + \frac{\mu V}{L^2} \nabla^{*2} \vec{v}^*$$

$$\left[ \frac{L}{V} \right] \frac{\partial \vec{v}^*}{\partial t^*} + (\vec{v}^* \cdot \vec{\nabla}^*) \vec{v}^* = - \left[ \frac{P_0 - P_\infty}{\rho V^2} \right] \vec{\nabla}^* P^* + \left[ \frac{gL}{V^2} \right] \vec{g}^* + \left[ \frac{\mu}{\rho V L} \right] \nabla^{*2} \vec{v}^*$$

Nondimensionalized Navier-Stokes:

$$[St] \frac{\partial \vec{v}^*}{\partial t^*} + (\vec{v}^* \cdot \vec{\nabla}^*) \vec{v}^* = - [Eu] \vec{\nabla}^* P^* + \left[ \frac{1}{Fr^2} \right] \vec{g}^* + \left[ \frac{1}{Re} \right] \nabla^{*2} \vec{v}^*$$

The relative importance of the terms in the NS equation depends only on the relative magnitudes of the dimensionless parameters in square brackets [ ] known as the Strouhal, St, Euler, Eu, Froude, Fr, and Reynolds, Re, numbers.

71

## Dynamic similarity



- Since there are four dimensionless parameters, dynamic similarity between a model and a prototype requires all four of these to be the same for the model and the prototype.

$$St_{\text{model}} = St_{\text{prototype}}$$

$$Eu_{\text{model}} = Eu_{\text{prototype}}$$

$$Fr_{\text{model}} = Fr_{\text{prototype}}$$

$$Re_{\text{model}} = Re_{\text{prototype}}$$



72

71

72

- If the flow is steady, then  $f = 0$  and the Strouhal number drops out of the list of dimensionless parameters ( $St = 0$ ). If the characteristic frequency  $f$  is very small such that  $St \ll 1$  the flow is called quasi-steady. This means that at any instant in time (or at any phase of a slow periodic cycle), we can solve the problem as if the flow were steady, and the unsteady term again drops out.
- The effect of gravity is usually important only in flows with free-surface effects (e.g., waves, ship motion, spillways from hydroelectric dams, flow of rivers). For many problems there is no free surface (pipe flow, fully submerged flow around a submarine or torpedo, automobile motion, flight of airplanes, birds, insects, etc.). In such cases, the only effect of gravity on the flow dynamics is a hydrostatic pressure distribution in the vertical direction superposed on the pressure field due to the fluid flow.

$$\text{Modified pressure: } P' = P + \rho gz$$

- In terms of which the NS equation becomes

$$\rho \frac{D\vec{V}}{Dt} = \rho \left[ \frac{\partial \vec{V}}{\partial t} + (\vec{V} \cdot \nabla) \vec{V} \right] = -\nabla P' + \mu \nabla^2 \vec{V}$$

73

73



## Dynamic and geometric similarity (MFM 534)

74

74

## Creeping flow (Stokes)

- Consider the class of flow called creeping flow.
- Other names for this class of flow include Stokes flow and low Reynolds number flow.
- As the latter name implies, these are flows in which the Reynolds number is very small ( $Re \ll 1$ ).
- By inspection of the definition of the Reynolds number,  $Re = \rho VL/\mu$ , we see that creeping flow is encountered when either  $\rho$ ,  $V$ , or  $L$  is very small or viscosity is very large (or some combination of these).



75

75

## Stokes flow

- Another example of creeping flow is all around us and inside us, although we can't see it, namely, flow around microscopic organisms. Microorganisms live their entire lives in the creeping flow regime since they are very small, their size being of order a few microns, and they move very slowly, even though they may move in air or swim in water with a viscosity that can hardly be classified as "large" ( $\mu_{air} \approx 1.8 \times 10^{-4} \text{ N}\cdot\text{s}/\text{m}^2$  and  $\mu_{water} \approx 1.0 \times 10^{-3} \text{ N}\cdot\text{s}/\text{m}^2$  at room temperature).
- Salmonella bacterium swimming through water. The bacterium's body is only about  $1 \mu\text{m}$  long; its flagella (hairlike tails) extend several microns behind the body and serve as its propulsion mechanism. The Reynolds number associated with its motion is much smaller than 1.



76

76

## Stokes flow

- For simplicity, we assume that gravitational effects are negligible, or that they contribute only to a hydrostatic pressure component, as discussed previously.
- We also assume either steady flow or oscillating flow, with a Strouhal number of order unity ( $St < 1$ ) or smaller, so that the unsteady acceleration term is orders of magnitude smaller than the viscous term [ $1/Re$ ] (the Reynolds number is very small).
- The advective term is of order 1, so this term drops out as well.

Thus, we ignore the entire left side of NS, which reduces to


$$\text{Creeping flow approximation: } [\text{Eu}] \nabla^2 P' \approx \left[ \frac{1}{\text{Re}} \right] \nabla^2 \vec{V}'$$

77

77

$$\text{Approximate Navier-Stokes equation for creeping flow: } \nabla^2 P \approx \mu \nabla^2 \vec{V}$$

You rely on inertia when you swim. For example, you take a stroke, and then you are able to glide for some distance before you need to take another stroke. When you swim, the inertial terms in the Navier-Stokes equation are much larger than the viscous terms, since the Reynolds number is very large.



For microorganisms swimming in the creeping flow regime, however, there is negligible inertia, and thus no gliding is possible. In fact, the lack of inertial terms has a substantial impact on how microorganisms are designed to swim. A flapping tail like that of a dolphin would get them nowhere. Instead, their long, narrow tails (flagella) undulate in a sinusoidal motion to propel them forward, as illustrated for a sperm. Without any inertia, the sperm does not move unless his tail is moving. The instant his tail stops, the sperm stops moving.

78

78

## Stokes equation

$$\bar{\nabla} P = \mu \nabla^2 \bar{V}$$

### Instantaneity


A Stokes flow has no dependence on time other than through time-dependent boundary conditions. This means that, given the boundary conditions of a Stokes flow, the flow can be found without knowledge of the flow at any other time.

### Time-reversibility

An immediate consequence of instantaneity, time-reversibility means that a time-reversed Stokes flow solves the same equations as the original Stokes flow. This property can sometimes be used (in conjunction with linearity and symmetry in the boundary conditions) to derive results about a flow without solving it fully. Time reversibility means that it is difficult to mix two fluids using creeping flow.

79

79



## Stokes flow

(MFM 191, 202, 204, 237)

Time-reversibility of Stokes Flows: Dye has been injected into a viscous fluid sandwiched between two concentric cylinders (top panel). The core cylinder is then rotated to shear the dye into a spiral as viewed from above. The dye appears to be mixed with the fluid viewed from the side (middle panel). The rotation is then reversed bringing the cylinder to its original position. The dye "unmixes" (bottom panel). Reversal is not perfect because some diffusion of dye occurs.


80

80

## Drag in Stokes flow

Drag force on a sphere in creeping flow:

$$F_D = 3\pi\mu VD$$

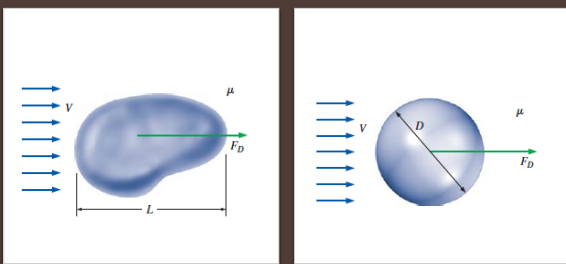

81

81

## Stokes flow past a sphere

When its inertial term is neglected, the Navier-Stokes equation becomes

$$-\nabla p^* - \eta \nabla \wedge (\nabla \wedge u) = 0, \quad (6.63)$$

which, since

$$\nabla \wedge (\nabla \wedge u) = \nabla(\nabla \cdot u) - \nabla^2 u,$$

is equivalent for an effectively incompressible fluid such that  $\nabla \cdot u$  is zero to

$$\nabla^2 u = \frac{1}{\eta} \nabla p^*. \quad (6.64)$$

This is the basic equation of motion for creeping flow. Its solutions for  $u$  can be in general of a *particular integral*,  $u_{PI}$ , and a *complementary function*,  $u_{CF}$ . The latter is a solution of  $\nabla^2 u = 0$ , which means that it is normally a solution of  $\nabla \wedge u = 0$  and can therefore be described by a potential  $\phi_{CF}$ . In the present problem the complementary function has to be chosen in such a way that it corresponds to uniform flow in the  $x_1$  direction at large distances from the sphere, so in the spherical polar coordinates defined in fig. 4.6 we may expect [84.7]

$$\phi_{CF} = UR \cos \theta + AR^{-2} \cos \theta.$$

82

82

or

$$u_{R,CF} = (U - 2AR^{-3}) \cos \theta, \\ u_{\theta,CF} = (-U - AR^{-3}) \sin \theta,$$

where the coefficient  $A$  remains to be determined.

We cannot hope to match the boundary condition that  $u = 0$  at  $R = a$  for all values of  $\theta$  unless  $u_{R,PI}$  and  $u_{\theta,PI}$  are likewise proportional to  $\cos \theta$  and  $\sin \theta$  respectively. But application of the divergence operator ( $\nabla \cdot$ ) to (6.63) shows at once that  $p^*$  obeys Laplace's equation,

$$\nabla^2 p^* = 0. \quad (6.65)$$

Where the flow is axially symmetric, as it is here,  $p^*$  must therefore be expressible, like  $\phi_{CF}$ , in solid harmonic functions. If it is defined to be zero at large values of  $R$  where  $u = U$ , then the only credible possibility is that

$$p^* = BR^{-2} \cos \theta, \quad (6.66)$$

where the coefficient  $B$  is independent of  $\theta$  and  $R$ . In that case  $\nabla p^*$  is proportional to  $R^{-3}$ , and  $u_{PI}$  must therefore be proportional to  $R^{-1}$ . Let us try

$$u_{R,PI} = CR^{-1} \cos \theta.$$

83

83

Then in order to satisfy the condition

$$\nabla \cdot u_{PI} = \frac{1}{R^2} \frac{\partial (R^2 u_{R,PI})}{\partial R} + \frac{1}{R \sin \theta} \frac{\partial (\sin \theta u_{\theta,PI})}{\partial \theta} = 0$$

we must set

$$u_{\theta,PI} = -\frac{1}{2} CR^{-1} \sin \theta.$$

These guesses have now to be checked by substitution into (6.64). Both sides of that equation are, of course, vectors, but to simplify the analysis we shall consider only their components in the longitudinal  $x_1$  direction; it can easily be verified that when these are equal to one another the transverse components are equal to one another also. On the left-hand side we have

$$\nabla^2 u_{1,PI} = \left[ \frac{1}{R^2} \frac{\partial}{\partial R} \left( R^2 \frac{\partial}{\partial R} \right) + \frac{1}{R^2 \sin \theta} \frac{\partial}{\partial \theta} \left( \sin \theta \frac{\partial}{\partial \theta} \right) \right] (u_{R,PI} \cos \theta - u_{\theta,PI} \sin \theta),$$

which simplifies to

$$\nabla^2 u_{1,PI} = \frac{1}{2} C \frac{1}{R^3} \frac{\partial}{\partial \theta} \left[ \sin \theta \frac{\partial}{\partial \theta} (2 \cos^2 \theta + \sin^2 \theta) \right] \\ = -\frac{C}{R^3} (2 \cos^2 \theta - \sin^2 \theta).$$

84

84

On the right-hand side we have

$$\frac{1}{\eta} \frac{\partial p^*}{\partial x_1} = \frac{1}{\eta} \left( \cos \theta \frac{\partial p^*}{\partial R} - \frac{1}{R} \sin \theta \frac{\partial p^*}{\partial \theta} \right)$$


$$= -\frac{B}{\eta R^3} (2 \cos^2 \theta - \sin^2 \theta).$$


Figure 6.12 Lines of flow past a sphere according to Stokes's solution.


These expressions can indeed be made equal to one another, by choosing  $C = B/\eta$ . Finally, to ensure that both  $u_R$  and  $u_\theta$  vanish at  $R = a$  we need to let  $A = -\frac{1}{2}a^2U$ ,  $C = -\frac{3}{2}aU$ .

The full solution, which is the only solution which satisfies the given boundary conditions, is therefore

$$u_R = u_{R,CV} + u_{R,VI} = U \cos \theta \left( 1 - \frac{3a}{2R} + \frac{a^3}{2R^3} \right), \quad (6.67)$$

$$u_\theta = u_{\theta,CV} + u_{\theta,VI} = -U \sin \theta \left( 1 - \frac{3a}{4R} - \frac{a^3}{4R^3} \right).$$

85

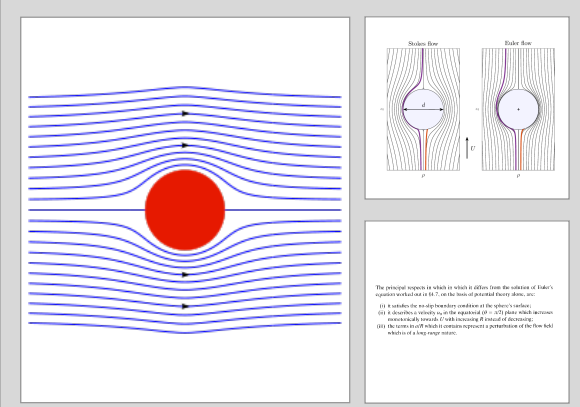

The principal objects to which it applies, from the solution of Euler's equation with values of  $\beta$  of the form of practical forces alone, are:

- (1) a bubble in a steady boundary condition at the sphere's surface;
- (2) a bubble in contact with the sphere at  $\theta = 0$  (the point where the velocity is zero);
- (3) the case in which the sphere is a part of a solid body of revolution.

(4) The case in which the sphere is a part of a solid body of revolution which is a large sphere.

86

### Pressure

According to this solution, the excess stress which acts upon the surface of the sphere has a normal component given by

$$p_n^* = p^* - 2\eta \left( \frac{\partial u_R}{\partial R} \right)_{R=a} = -\frac{3\eta U \cos \theta}{2a},$$

[(6.11)] and a shear component acting in the direction of increasing  $\theta$  given by

$$s_{\theta R} = \eta a \left\{ \frac{\partial}{\partial R} \left( \frac{u_\theta}{R} \right) + \frac{1}{a^2} \frac{\partial u_R}{\partial \theta} \right\}_{R=a} = -\frac{3\eta U \sin \theta}{2a}$$

[(6.3) and (6.53)]. Taken together, these components are equivalent to a uniform force per unit area in the direction of  $U$  of magnitude  $3\eta U/2a$ . The total drag force in the direction of  $U$  is therefore

$$F_D = 4\pi a^2 \frac{3\eta U}{2a} = 6\pi\eta a U. \quad (6.68)$$

This expression constitutes *Stokes's law*.

87

### Discussion

It is only in the limit when velocity  $U$  and Reynolds Number  $\beta a$  ( $= 2\pi a U/\eta$ ) tend to zero that the assumption on which Stokes's law is based is fully consistent with the details of his solution. Since the leading term in  $u$  is  $U$ , while the next terms in (6.67) are proportional to  $a/U R$ , the inertial term in the Navier-Stokes equation,  $\rho u \cdot \nabla u$ , is of order  $\rho U^2 a/R^2$  at large values of  $R$  according to Stokes, while the viscous term  $\eta \nabla^2 (\nabla \wedge u)$  is of order  $\eta U/R^3$ . Far from being negligible, the inertial term is clearly liable to exceed the viscous term at distances such that

$$R > \frac{\eta}{\rho U} = \frac{2a}{\beta a}.$$

The inconsistency may suggest to the reader that we cannot trust equations (6.67) to describe the velocity distribution in the immediate vicinity of the sphere, and that we therefore cannot trust Stokes's law, unless  $\beta a$  is really quite small compared with unity. It is only when  $\beta a$  reaches about 0.5, however, that deviations from the law become detectable experimentally.

Needless to say, if Stokes's law applies in a frame of reference such that the sphere is stationary then it applies also in the frame in which the distant fluid is stationary and the sphere is moving instead. Thus a solid sphere of radius  $a$  and density  $\rho_{sol}$ , falling down the axis of a vertical cylinder of sufficiently large radius which is filled with liquid of density  $\rho_{liq}$ , may be expected to reach a terminal velocity  $U$  such that

$$6\pi\eta a U = \frac{4}{3}\pi a^3 (\rho_{sol} - \rho_{liq}) g. \quad (6.69)$$

88

provided that

$$\beta a = \frac{4a^2 \rho_{liq} (\rho_{sol} - \rho_{liq}) g}{9\eta^2} < 0.5, \quad (6.70)$$

If the falling sphere is itself liquid, with viscosity  $\eta'$ , circulating currents arise within it as it falls which modify the flow pattern outside the sphere. The modified form of Stokes's law which applies in these circumstances is

$$F_D = \frac{4\pi\eta a U (\eta + \frac{2}{3}\eta')}{\eta + \eta'}. \quad (6.71)$$


This evidently reduces to (6.68) when  $\eta' \gg \eta$ , e.g. under the conditions of Millikan's celebrated experiment, where the spheres were oil drops moving through air. At the opposite extreme where  $\eta' \ll \eta$ , however, e.g. where the spheres are very small bubbles of gas rising (rather than falling) through soda water or champagne, it reduces to  $F_D = 4\pi\eta a U$ , so the terminal velocity of such bubbles should be

$$U = \frac{a^2 \rho_{liq} g}{3\eta} \quad (6.72)$$

[(6.69), but with 6 replaced by 9 and with  $\rho_{sol}$  replaced by  $\rho_{liq}$ ;  $\rho_{liq}$  is negligible compared with  $\rho_{sol}$ ]. In fact, (6.72) does not describe the terminal velocity of rising soda water bubbles at all accurately. That is partly because the Reynolds Number normally exceeds 0.5 but also, it seems, because impurities adsorbed on the gas-liquid interface endow this interface with some measure of rigidity. It can be shown, incidentally, that the stresses which act on a gas bubble which is rising steadily with  $\beta a \ll 1$  do not tend to distort it; it should – and does – remain spherical.

89

### Creeping (Stokes) flow past a liquid sphere

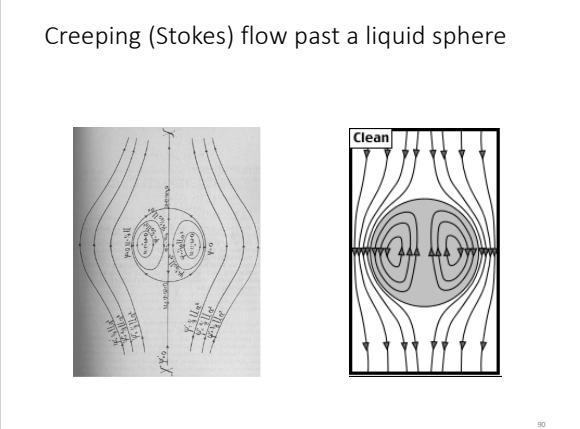

90